

12

# EUROPEAN PATENT APPLICATION

21 Application number: 88118541.7

51 Int. Cl.<sup>5</sup>: G09G 3/20, G02F 1/133

22 Date of filing: 08.11.88

43 Date of publication of application:  
16.05.90 Bulletin 90/20

84 Designated Contracting States:  
DE FR GB IT


71 Applicant: **HONEYWELL INC.**  
Honeywell Plaza  
Minneapolis Minnesota 55408(US)

72 Inventor: **Silverstein, Louis D.**  
9795 E. Pershing Avenue  
Scottsdale Arizona 85260(US)  
Inventor: **Monty, Robert W.**  
2745 W. Villa Rita  
Phoenix Arizona 85023(US)

74 Representative: **Rentzsch, Heinz et al**  
Honeywell Europe S.A. Holding KG Patent &  
License Dept. Postfach 10 08 65  
Kaiserleistrasse 39  
D-6050 Offenbach am Main(DE)

54 **Four-color repetitive sequence matrix array for flat panel displays.**

57 A four color repetitive sequence matrix array for flat panel displays is formed by establishing a repetitive sequence with pixels of four different colors arranged in the rows of the matrix. The sequence commences with a different color in each row, thereby establishing a second repetitive sequence in the matrix columns. These row and column sequences establish a pattern of 16 pixels with sets of four rows and four columns that is repetitive throughout the array.

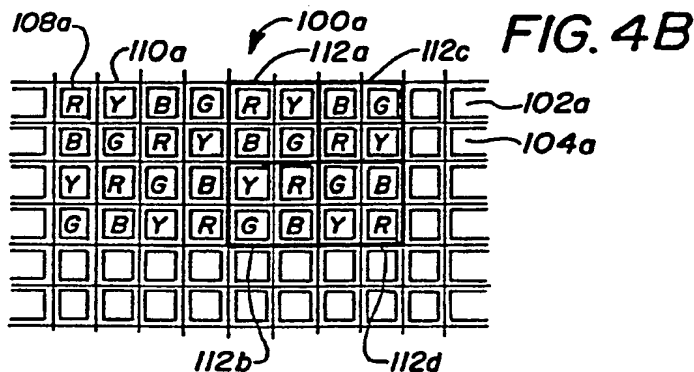

EP 0 367 848 A1

## FOUR-COLOR REPETITIVE SEQUENCE MATRIX ARRAY FOR FLAT PANEL DISPLAYS

### BACKGROUND OF THE INVENTION

#### Field of the Invention

This invention relates generally to pictorial communication and more particularly to flat-panel type color matrix display devices, such as those in which a discretely addressable matrix of red, green, and blue (R-G-B) picture elements are used to generate full-color alphanumeric, graphic and/or television video images.

#### Background of the Invention

The current generation of full-color matrix display devices do not possess sufficient pixel density to produce high-quality color images in all angular image orientations. Attempts to pack three primary color pixel (typically R-G-B) within a regular matrix, which greatly facilitates the construction and implementation of discrete pixel addressing schemes, produces asymmetrical angular resolution for images of different colors. Insufficient pixel density and asymmetrical angular resolution manifest themselves as image coarseness and color "fringing or aliasing". Coarseness and/or asymmetry of R and G primaries are particularly problematic, especially for the mixture colors yellow (R + G) and white (R + G + B). The problem arises due to the human visual system's high degree of resolution acuity for R and G. This makes the fusion of R and G primary elements difficult at practical levels of discrete element pixel density.

Two approaches have been investigated to solve this problem. The first, and most obvious, is to increase the pixel density to the point where discrete element quantization effects become insignificant. Extremely high pixel density appears to be impractical due to limitations relating to manufacturability, cost, and driver complexity. The second approach has been to define optimized geometric arrangements of R-G-B elements which minimize color fringe/aliasing effects and enable a usable resolution to be achieved in all angular image orientations. This second approach has proven difficult, primarily because of limitations relating to relatively low pixel density (coarseness) and suboptimal geometry in attempting to pack 3-color R-G-B triads into a regular orthogonal matrix. Arrangements of pixels into quadrates rather than triads has helped the angular effects, however, color fringes when combining R and G elements

have continued to be difficult to eliminate.

The foregoing illustrates limitations known to exist in present devices. Thus, it is apparent that it would be advantageous to provide an alternative directed to overcoming one or more of the limitations set forth above. Accordingly, the invention provides a suitable alternative including features more fully disclosed hereinafter and characterized in the claims.

In one aspect of the present invention, this is accomplished by providing a color matrix array including a plurality of four color pixel patterns in the matrix. Each pattern includes R-G-B pixels and a yellow (Y) pixel. The matrix comprises a plurality of adjacent rows and adjacent columns. Each pattern is formed by the intersection of any two adjacent rows with any two adjacent columns.

The foregoing and other aspects will become apparent from the following detailed description of the invention when considered in conjunction with the accompanying drawing. It is to be expressly understood, however, that the drawing is not intended as a definition of the invention but is for the purpose of illustration only.

### BRIEF DESCRIPTION OF THE DRAWING

In the drawing:

Figure 1 is a perspective view illustrating an embodiment of major device components to color image forming color pixel matrix;

Figures 2a, 2b, 2c and 2d, are diagrammatic views illustrating previously developed color pixel arrangements for matrix displays.

Figures 3a, 3b, 3c and 3d are diagrammatic views illustrating white lines in vertical, horizontal and two 45 degree angular orientations for the pixel arrangements illustrated in Figures 2a, 2b, 2c and 2d; and

Figures 4a, 4b, 4c, and 4d, are diagrammatic views illustrating embodiments of a color matrix array and the resulting white lines in accordance with this invention.

### DESCRIPTION OF THE PREFERRED EMBODIMENT

A color matrix display may employ any number of techniques to generate full color imagery. The display may be self-luminous, as in the case of multi-color light emitting diode (LED) matrix dis-

plays or matrix addressed electroluminescent (EL) panels. the display may also be non-self-luminous, such as in liquid crystal (LC) matrix displays in which electronic control of LC molecule alignment and orientation enable incident light to be either transmitted or absorbed. A passive non-self-luminous device such as an LC matrix display is often described as a "light valve" in that the pixels serve to form a quantized image by selectively passing or obstructing light from an external source. The common feature in creating full-color imagery with all current matrix display technologies is the mosaic of color primary elements, typically R-G-B. In the case of self-luminous devices, separate emitters which each produce light in one of the wavelengths bands of the primary colors are required, and these separate emitters are arranged to produce the color matrix pixel pattern. In the case of the passive, non-self luminous device, such as the LC matrix, a color filter array is imposed over the matrix of individual light valves and aligned such as to produce a mosaic of color pixels. Again, these are typically R-G-B filter elements. Figure 1 illustrates the relationship between the components of a typical passive color matrix device, generally designated 10, modified to add a fourth color, yellow (Y), and the color filter array which determines the color pixel arrangement. The concept and properties of the color pixel arrangement are the major subject matter of this invention.

Device 10 is subjected to a back light and comprises a polarizer 12, and a glass substrate 14 including a plurality of thin film transistors 16. A well-known liquid crystal material 18 is between substrate 14 and a common electrode 20 including B-G-R-Y color filters 22, 24, 26, 28, respectively. Another glass substrate 30 and polarizer 32 complete the elements of device 10.

Figures 2a, 2b, 2c, and 2d illustrate four color pixel arrangements which are known to be either under investigation or implemented for color matrix displays. Figure 2a shows an R-G-B arrangement with a diagonal orientation of color primaries. Figure 2b shows an R-G-B arrangement in which the primary color pixels are packed in triads. This has an offset structure, reminiscent of color triad arrangements commonly used on delta gun shadow-mask color cathode ray tubes. Figure 2c depicts an R-G-B pattern with a vertical stripe orientation of color primaries. This pattern is reminiscent of inline gun shadow mask color cathode ray tubes. Figure 2d shows a four-element R-G-B-G pattern.

Figures 3a, 3b, 3c, and 3d show synthesized white lines composed of R-G-B elements in vertical, horizontal, and two 45 degree orientations for each of the four color pixel arrangements described above and in Figures 2a, 2b, 2c, and 2d. The letter designation in each of the two sets of

figures are correlated in that each letter is associated with one of the four pixel arrangements. It should be noted that in the four-element pattern of Figures 2d and 3d, the two, redundant G elements would each be driven so as to produce half the total required green luminance at each of the two G pixels. The importance of Figures 3a, 3b, 3c, and 3d is the illustration of varying degree of line width non-uniformity and "stair stepping" or "aliasing" of straight lines as a function of the angular orientation of the lines and the arrangement of primary color pixels. The four-element pattern of Figure 2d is seen to produce the most uniform line widths and least amount of stair-stepping or aliasing. This is the result of the more angularly symmetrical packing of four-element color pixels in a regular rectangular matrix than any of the three-element patterns. What is not apparent from a monochromatic representation of Figures 3a, 3b, 3c, and 3d are the color fringe patterns or color aliasing typically observed in the different color pixel arrangements as a function of angular orientation of line images. These effects are dependent upon the size, chromaticity, luminance, and shape of individual color pixels and thus are not easily demonstrable in graphic form or in monochrome. The effects are easily observable in current color matrix displays, and are primarily attributable to the lack of sufficient visual integration of R and G elements, which is a function of the good resolving capability of the human system for medium G and long R wavelengths of the visible spectrum. For example, in a Y image composed of R and G elements the observer sees an image with a yellowish appearance but is also able to resolve individual R and G elements. Rather than a solid Y image, the image appears as being composed of a mosaic of individual elements. Furthermore, edge and asymmetry affects can cause specific primary colors to accumulate at the edge of images resulting in pronounced primary color fringes and poor image quality. The severity of image degradation varies with the color pixel arrangement and the angular orientation of lines used to construct the image. The same is true for white images composed of R-G-B elements. The R and G elements are individually resolvable, even at relatively small pixel sizes (e. g. .008-.010 inches) and at normal viewing distances estimated at approximately 20 - 28 inches. However, owing to the unique nature of the short wavelength (B sensitive) visual mechanism, B elements at the appropriate relative luminance level for white mixture are virtually unresolvable under the same conditions.

Embodiments of color matrix array 100, 100a in accordance with this invention are illustrated in Figures 4A, 4B respectively. Array 100, Figure 4A comprises a plurality of adjacent rows 102, 104.

Each row 102, 104 includes a plurality of picture elements (pixels) 106. Rows 102, 104 extend in a first direction indicated by the directional arrow designated F. Array 100 also comprises a plurality of adjacent columns 108, 110. Each column 108, 110 also includes a plurality of pixels 106. Columns 108, 110 extend in a second direction, normal to the first direction, and indicated by the directional arrow designated S.

Each array of either Figure 4A or 4b includes a plurality of four-color pixel patterns 112 formed by the intersection of any two adjacent rows with any two adjacent columns. Each pixel pattern includes an R, Y, B and G pixel.

Specific to the array of Figure 4A, one of the rows 102 includes an alternating pattern of two of the four pixels, e. g. R and Y. Adjacent row 104 includes an alternating pattern of another two of the four pixels, e. g. B and G. One of the columns 108 includes an alternating pattern of two of the four pixels, e. g. R and B. Adjacent column 110 includes an alternating pattern of another two of the pixels, e. g. Y and G. As a result, a single four-color pixel pattern 112 is repeated throughout the matrix.

Specific to the array of Figure 4B, each adjacent row, includes a sequential pattern of each of the four pixels, e. g. row 102a includes R, Y, B and G pixels and row 104a includes B, G, R and Y pixels. Each adjacent column includes a sequential pattern of each of the four pixels, e. g. column 108a includes R, B, Y and G pixels. Adjacent column 110a includes Y, G, R and B pixels. As a result four, four-color pixel patterns 112a, 112b, 112c and 112d are sequentially repeated throughout the matrix.

Figures 4a and 4b reveal the pattern or invention, while Figures 4c and 4d depict synthesized white lines in vertical, horizontal, and two 45 degree orientations produced by the R-G-B-Y pixel arrangements. Figure 4a shows a R-G-B-Y pattern in which the same 4-pixel R-G-B-Y element is repeated regularly throughout the matrix. Figure 4b shows a variant of the pattern in which rows of the R-G-B-Y pattern alternate simply in horizontal dimension of the matrix and columns of the pattern alternate simply in the vertical dimension of the matrix.

The pattern of Figure 4b, while slightly more complex, enables more symmetrical lines to be produced in angles just slightly off the major horizontal and vertical dimensions. The uniformity of line widths and relative freedom from stair-stepping or aliasing is apparent from Figures 4c and 4d. Again, color specific properties cannot be depicted in a monochromatic representation.

What is evident from full-color images of correct size, chromaticity, and luminance, is the ab-

sence of color fringe patterns or color aliasing in images produced by the R-G-B-Y color pixel arrangement. The invention allows color images in R, G, B and Y to be produced by single primary color elements, while the mixture colors magenta (R + B), cyan (G + B), and white (Y + B) are generated by a maximum of two primary colors, one of which is always B. Since B has special characteristics in being extremely potent in determining chromaticity at luminance levels where it is barely resolvable (if at all), all mixture colors appear as a single, homogeneous image whose chromaticity is determined by the mixture of the two primaries but whose brightness and geometric appearance are determined virtually solely by the non-blue primary element. The improvements in color matrix display image resulting from the utilization of the present invention are highly significant and often dramatic.

The foregoing has described devices for the display of color which utilize a number of discretely addressable pixels each of which will produce a single primary color when activated and when appropriately activated in combination with other color pixels, will form a spatially synthesized full color image. More specifically the present invention relates to flat-panel type color matrix display devices, such as those in which a discretely addressable matrix of R-G-B picture elements are used to generate full-color alphanumeric, graphic and/or television-type video images. The present invention includes an additional primary color, Y, to produce a four primary color system R-G-B-Y.

The present invention employs a 4-primary color pattern. The r-color pattern has two major advantages for the design of limited resolution, color matrix displays: 1) the inclusion of a Y primary eliminates the need for problematic R+G color mixes in that Y can be produced by a single element rather than a R+G mix and white can be produced by a Y+B mix rather than the typical R+G+B combination; and 2) angular asymmetries for either single or double element lines are minimized for all primary and mixture colors. Previous basic vision experiments have indicated that blue chromaticity integrates over a large spatial area. Blue, therefore effectively enables color change but contributes very little to luminance or visible resolution. By adding the Y primary color, this feature of human vision is used to advantage by enabling all secondary or mixture colors to be produced by either a R, G or Y primary color, this feature of human vision is used to advantage by enabling all secondary or mixture colors to be produced by either a R, G or Y primary in combination with B. The R, G or Y primaries need not be activated in combination to produce mixture colors. When B is used in combination with other primaries, it enables the color to be changed without producing observ-

able fringe patterns or growth in line width. The reduction or elimination of angular asymmetry is an additional benefit resulting from the fact that a 4-color primary pixel pattern can be packed more symmetrically in a regular matrix than a 3-color primary pattern. This minimizes jagged edges on lines of various angular orientations and also serve to minimize color fringing or aliasing.

The significant advantage of the 4-color (R-G-B-Y) pixel arrangement are: 1) minimization of perceived color fringe or color aliasing problems; and 2) better symmetry of various colored lines or images across angular orientations. The first advantage is derived by appealing to the human visual system's large area spatial chromatic integration function for short-wavelengths and poor short-wavelength luminance resolution, while the advantage of greater symmetry is due to the ability to achieve a more angularly symmetric geometry when packing a 4-color primary pixel arrangement into a regular matrix. These two features enable much better color matrix display image quality to be achieved with the present invention without the cost and complexity of increasing pixel density.


While the invention has been described in its preferred embodiments, it is to be understood that the words which have been used are words of description rather than of limitation and that changes within the purview of the appended claims may be made without departure from the true scope and spirit of the invention in its broader aspects.

## Claims

1. A flat panel display comprising a plurality of pixels each being one of four colors; blue, green, red or, yellow arranged to form a matrix of rows and columns wherein said columns are perpendicular to said rows **characterized** in that each row in said matrix has a repetitive sequence of said four colors, each row in a set of four rows commencing with a different one of said four colors such that a first group of two contiguous rows in said set of four rows has a first repetitive row sequence of said four colors and a second group of two contiguous rows in said set of four rows has a second repetitive row sequence of said four colors, thereby establishing repetitive sets of four rows, in that said first and second row sequences are arranged such that a repetitive set of four columns is established wherein a first group of two contiguous columns have a first repetitive column sequence of said four colors and a second group of two contiguous columns have a second repetitive column sequence of said four colors and in that said first and second row sequences with said first and second column

sequences establish blocks of four pixels in said matrix formed by two rows and two columns wherein each block contains said four colors, one in each element.

2. A flat panel display in accordance with Claim 1 further characterized in that two contiguous blocks of said four pixels in a first row sequence and two contiguous blocks of said four pixels in a second row sequence form first and second column sequences of said blocks of said four pixels such that a repetitive sequence of a 16 pixels pattern is formed that is repetitive throughout said matrix.

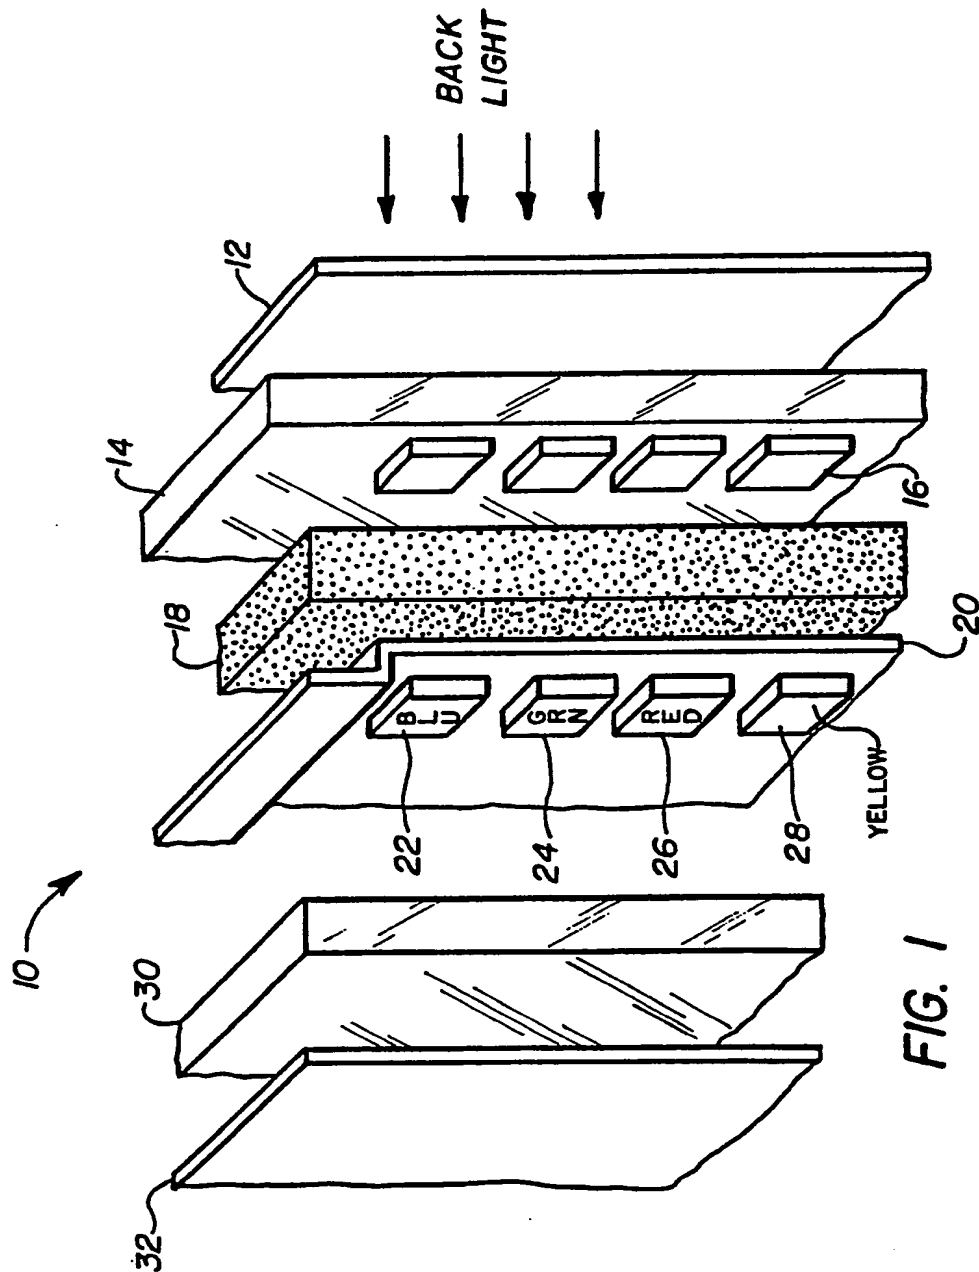

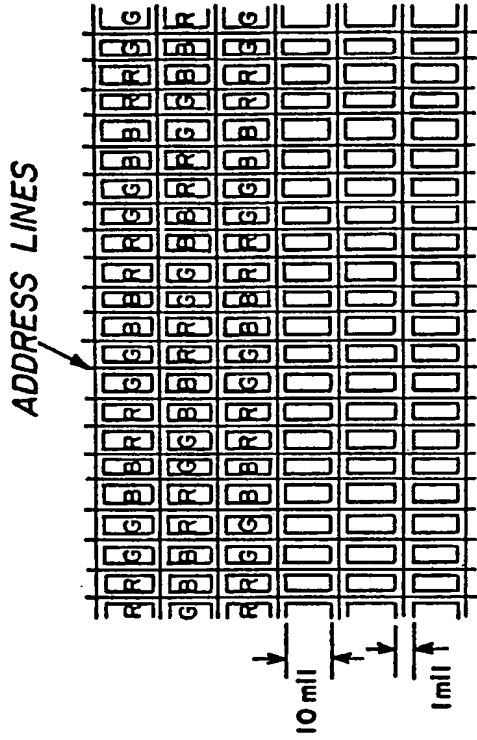


FIG. 2B

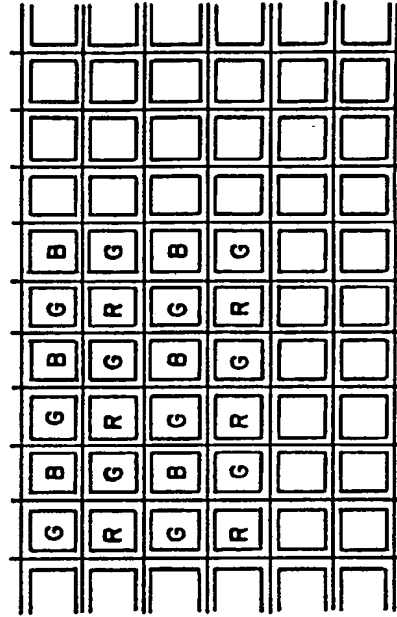


FIG. 2D

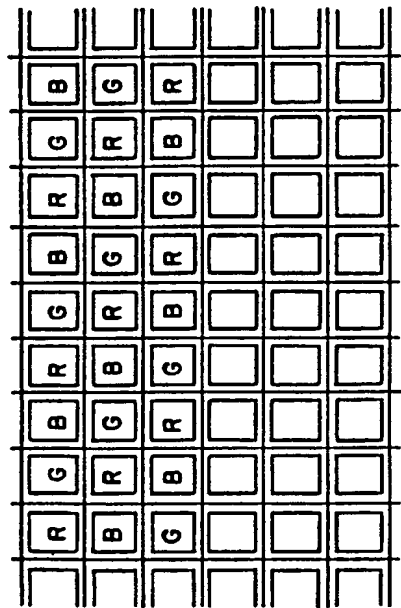


FIG. 2A

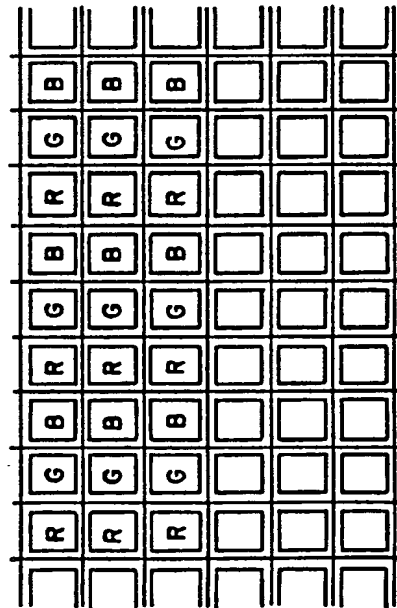




FIG. 2C



**FIG. 3A**

R				BR				BR
GBR				G				BRG
GBR				BR				RG
GB				G				GB
GB				BR				GB
RG				G				BR
BR				BR				BR
BR				G				RG
GBR				BR				RG
GBRG				GB				
GBRGB								
RGBR								
RGBRGBRGBRGBRGBRGBRGBR								
RGBR				RGBR				
RGBRGBR								
GBG				G				
GBBR				BR				GB
BR				G				RGB
BR				BR				RG
RG				G				BR
RG				BR				GBR
GB				G				GBR
GBR				BR				GB
BR				G				RG
R				RB				BR


[illegible]

**FIG. 3D**

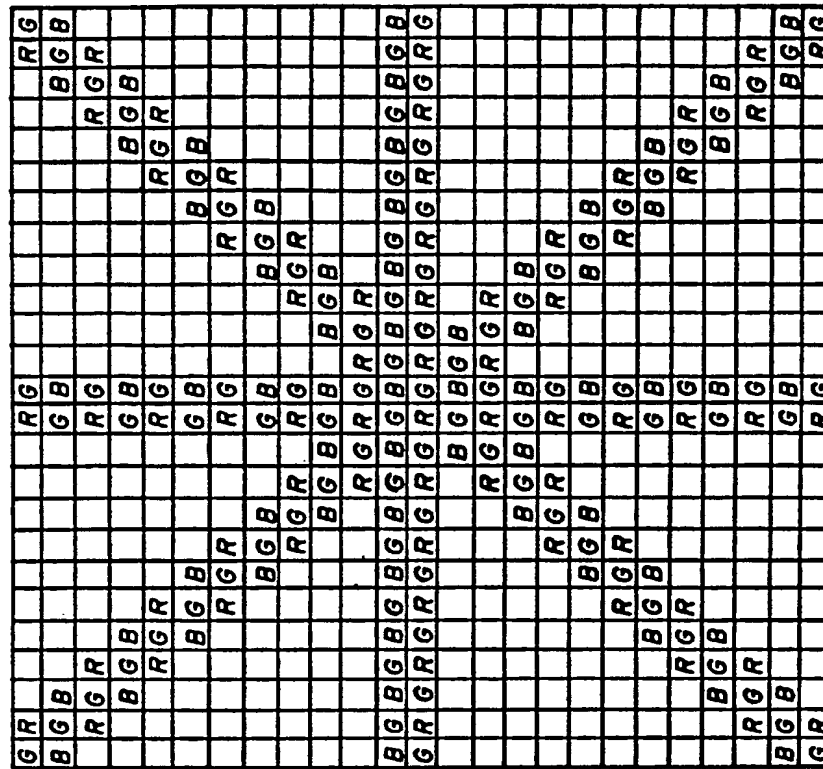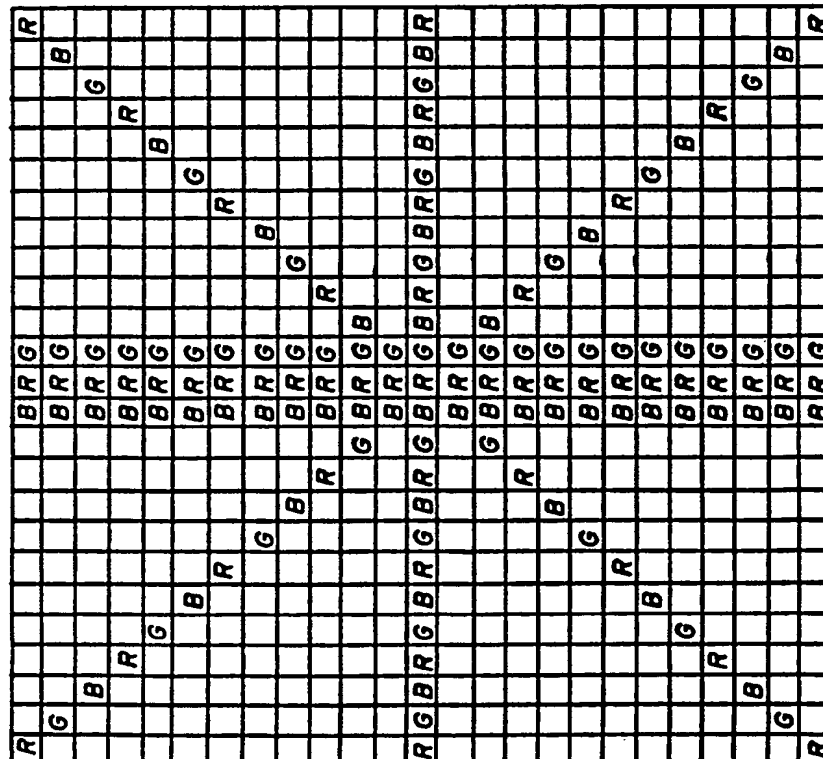


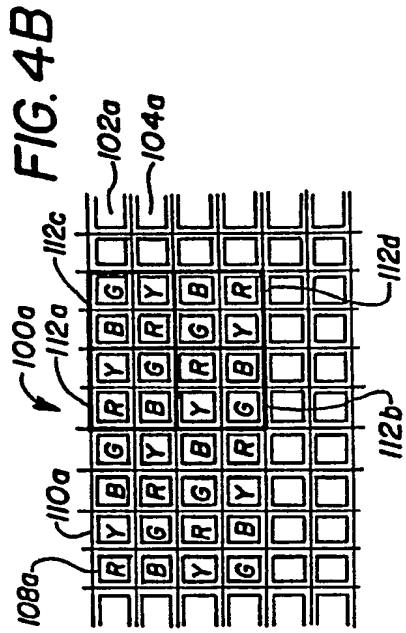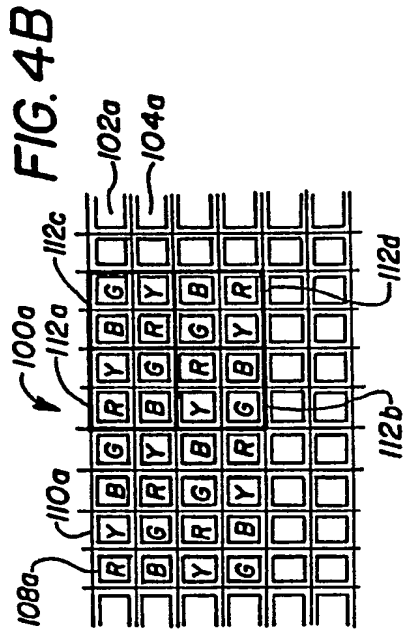

**FIG. 4D**

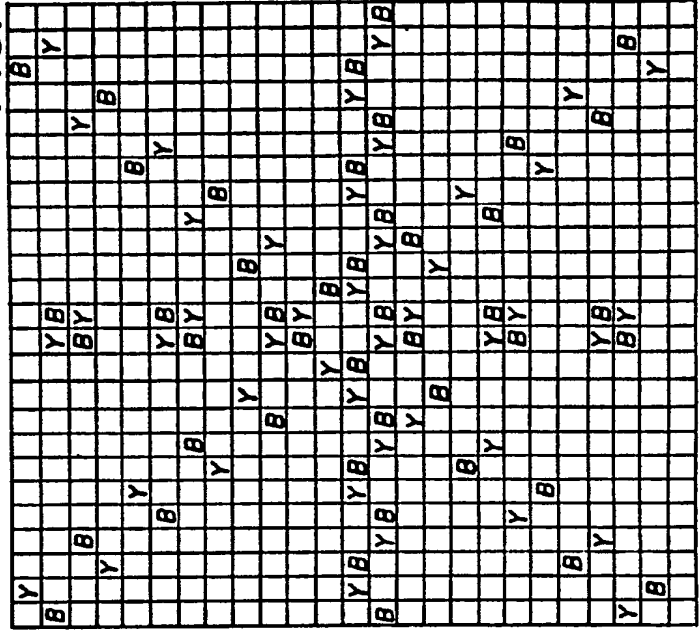

**FIG. 4C**

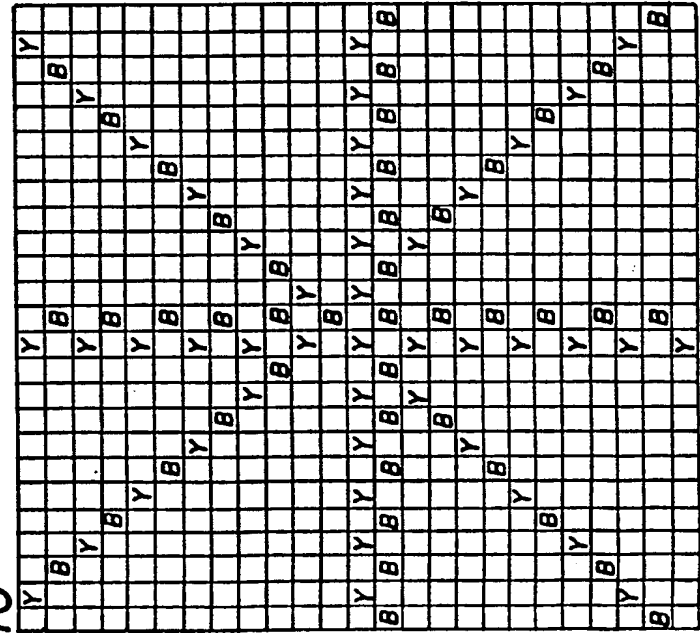



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 88 11 8541

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
X	EP-A-0 096 856 (INTERNATIONAL STANDARD ELECTRIC CORP.) * Figure; page 4, lines 21-36; claims 1,3 *	1	G 09 G 3/20 G 02 F 1/133
A	GB-A-2 139 393 (DAINIPPON SCREEN MFG CO. LTD) * Figures 4,8; page 1, lines 69-86; page 4, lines 7-29 *	1	
A	GB-A-2 180 979 (MATSUSHITA ELECTRIC INDUSTRIAL CO. LTD) * Figures 4b,6a; claim 1; page 4, lines 20-24; page 3, lines 18-70; column 1, lines 19-26 *	1	
A	FR-A-2 451 082 (HITACHI LTD) * Figures 1a,2; page 6, line 29 - page 7 *	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 5)
			G 09 G G 02 F G 09 F
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
THE HAGUE	14-07-1989	TIBAU M.J.P.G.	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			